



WOODFOIL® / WOODFOIL® AB

DIFFUSION PANEL

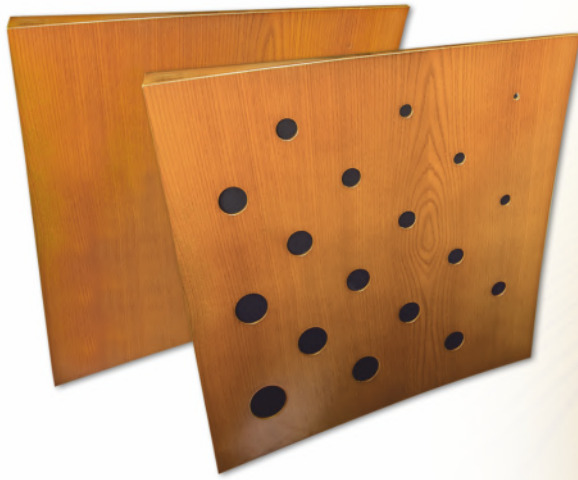


Image of 60x60cm models Ref.:WFL060 and WFL060Ab (on the left) and 60cm Ref.:WFL060Ab (ambient image).

DESCRIPTION

The Woodfoil® is a slightly concave diffusion panel, made of varnished birch plywood on a soft wood structure.

This diffuser is great to be used in concert halls, such as theatres and auditoriums, and is ideal for building acoustic diffusion shells.

This model has two options: the Woodfoil® diffusion panel, which is made of plain birch plywood, and the Woodfoil®AB, which has different holes that provide it with a higher absorption coefficient.

Its format allows us to make the appropriate adjustment, by using several panels and positions through 90° rotations, in order to obtain the goals required for each room.


Both the angle and the gyrate of this piece were calculated to provide a more versatile use. When using multiple pieces jointly, the angle of incidence never is too convergent, thus providing a homogeneous scattering diffusion of sound energy, which contrasts with other models from our brand that have a different development conception.

The Woodfoil® is available in various wood finishings or regular colours, as an option, thus allowing an appropriate background for each space. The mounting process is rather easy by simply using the docking accessories that are supplied.

FEATURES

- Manufactured with Birch Plywood.
- Woodfoil® Average diffusion: **0.68/m²** [$>100\text{Hz}; <5\text{KHz}$].
- Woodfoil®AB Average diffusion: **0.51/m²** [$>100\text{Hz}; <5\text{KHz}$].
- **NRC: 0.23/m²** [$>250\text{Hz}; <10\text{KHz}$](WFL060); **0.62/m²** [$>250\text{Hz}; <10\text{KHz}$](WFL060AB).
- Fire-resistance: Euroclass B-s2,d0 (similar to old M1).
- Two options: Woodfoil® (diffusor) Woodfoil®AB (diffusion with absorption characteristics).
- Installation: accessories included.

TECHNICAL DRAWINGS

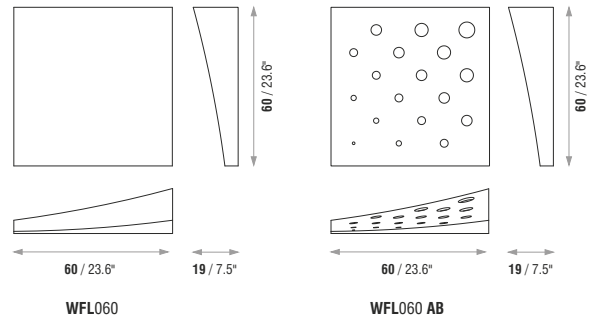


MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
●● WFL060	60 cm (23.6 in)	60 cm (23.6 in)	19 cm (7.5 in)	2.9 Kg (6.39 lbs)
●● WFL060 AB	60 cm (23.6 in)	60 cm (23.6 in)	19 cm (7.5 in)	2.8 Kg (6.17 lbs)

DIFFUSION - ABSORPTION COEFFICIENT

Model	50	63	80	100	125	160	200	250	315	400	500	630	800	1k	1.25k	1.6k	2k	2.5k	3.15k	4k	5k	6.3k	8k	10k	NRC/AVERAGE
WFL060	0.02	0.05	0.08	0.28	0.38	0.47	0.56	0.60	0.68	0.71	0.77	0.79	0.80	0.83	0.81	0.78	0.79	0.78	0.76	0.77	0.75	0.74	0.72	0.70	0.68
αS	0.03	0.07	0.10	0.12	0.17	0.22	0.25	0.28	0.24	0.26	0.31	0.28	0.22	0.17	0.16	0.15	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.08	0.23
WFL060AB	0.01	0.04	0.06	0.20	0.28	0.32	0.38	0.42	0.44	0.50	0.61	0.63	0.65	0.64	0.62	0.59	0.57	0.54	0.55	0.58	0.59	0.55	0.57	0.56	0.51
αS	0.04	0.08	0.12	0.18	0.29	0.41	0.50	0.57	0.55	0.63	0.72	0.69	0.63	0.62	0.58	0.56	0.57	0.58	0.54	0.52	0.48	0.47	0.45	0.41	0.62

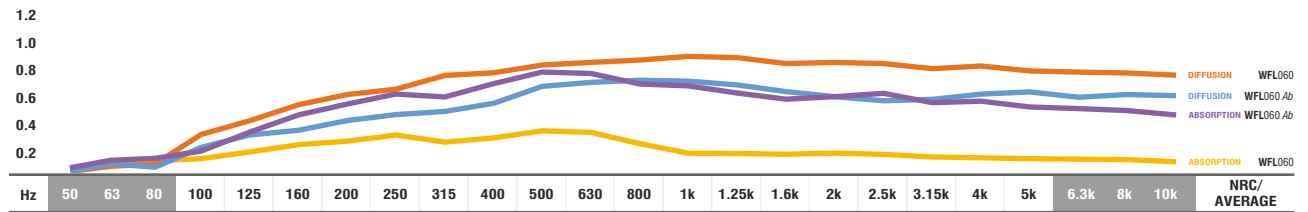

- ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.
 - DIFFUSION COEFFICIENT: These values were obtained by mathematical calculations and tests carried out in our laboratory.
- Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

WOOD VENEER FINISHINGS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Due to its natural origin, wood-based products will always present natural imperfections inherent to the organic nature. And for similar reasons, they will also present traces of old-age in the course of time.
- Wood and Fabric products are highly susceptible to change its appearance with humidity and temperature. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly (+/-3mm) due to their production method and some inherent raw-materials characteristics.

